

# ICON<sup>®</sup> Bus



## ICON Bus

... meets or exceeds the increased requirements of state-of-the-art automation technology.

- ICON Bus offers a wide range of bus cable types designed for various bus systems and is available in standard and special designs which meet ICON Base, ICON Safe, ICON Chem and ICON Arctic requirements.
- The ICON Bus product family covers the whole range of bus cables used in automation technology, such as Foundation Fieldbus, Profibus DP and PA, CANbus and MODbus, etc.
- ICON Bus quality products meet or exceed the most stringent electrical requirements, such as Type A according to IEC 61158-2.
- ICON Bus cables were designed according to recognised standards, such as EN 50288-7, UL 13 and FF-844.
- Available via worldwide warehousing.
- Products with approvals acc. to UL, GOST or FF-844, etc.

# LEONI

**Sales Enquiries** 1800 66 99 99  
[www.madisonexpress.com.au](http://www.madisonexpress.com.au)

DISTRIBUTED BY



## Fieldbus Cables

In automation technology, a wide range of factors determine which field-bus system to use. As a result of its technical properties, each bus system is adapted to a certain sector and a certain application.

The ICON Bus product family includes all bus cables used in automation technology such as Foundation™ Fieldbus, Profibus DP and PA, CAN and Modbus.

All of these types of bus are supplied in various different versions. The basic types are the standard designs for permanent installation. In order to optimize the time required for installation, they are also available in the FA (Fast Assembly) version for easy access with a special tool. "Flex" products are available for flexible applications. The Eco version is a standard cable without a braided shield. For use as trunk cables with reduced voltage drop there are long-distance versions with insulation of PE.

ICON Bus quality products meet the most stringent electrical requirements such as those made on Type A according to IEC 61158-2.





It goes without saying that ICON Bus includes a large number of products with various forms of certification such as UL, GOST or FF-844. Project requirements can thus generally be met with short delivery times and without the necessity of further certification.

The typical feature of ICON Bus is the rapid availability of most types as they are available from stock worldwide.

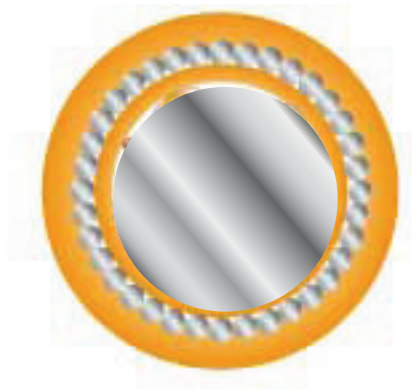
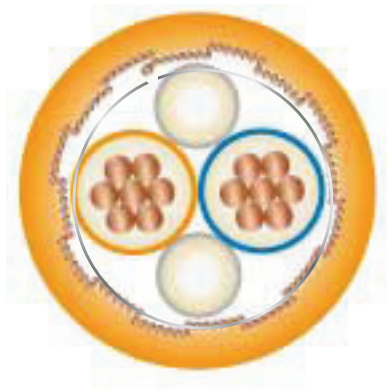
The bus cables of the ICON Bus are designed according to recognized standards such as EN 50288-7, UL 13 or FF-844.

## The ICON Bus product range

ICON Fieldbus Cables		Profibus DP								Profibus PA								Foundation Fieldbus																				Modbus				CAN-Bus												
Insulation		Foamed polyethylene with skin								Foamed polyethylene with skin					XLPE			Foamed polyethylene with skin layer										XLPE							Thermoplastic compound																			
		ICON Bus 50900 MR CEOS	ICON Bus 50900 MR COS	ICON Bus 50900 MR CEOS	ICON Bus 50900 MP COS	ICON Bus 50910 MR COS	ICON Bus 50900 M9 CEOS	ICON Bus 50900 M5 CEOS	ICON Bus 50900 M5 COS	ICON Bus 50900 MR CEOS	ICON Bus 50900 MR COS	ICON Bus 50900 MR CEOS	ICON Bus 50910 M0 CEOS	ICON BUS 50900 M5 CEOS	ICON Bus 50910 M5 CEOS	ICON Bus 50100 M1 CEOS	ICON Bus 50810 M3 OS	ICON Bus 50800 M3 OS	ICON Bus 50900 M0 CEOS	ICON Bus 50900 M0 COS	ICON Bus 50900 M0 CEOS	ICON Bus 50910 M0 CEOS	ICON Bus 50911 M0 CEOS	ICON Bus 50900 M0 OS	ICON Bus 50910 M0 OS	ICON Bus 50900 M0 OS	ICON Bus 50900 M3 CEOS	ICON Bus 50910 M3 CEOS	ICON Bus 51100 M1 CEOS	ICON Bus 50110 M1 CEOS	ICON Bus 51100 M1 OS	ICON Bus 50110 M1 CEOS	ICON Bus 50110 M1 OS	ICON Bus 51111 M1 OS	ICON Bus 50810 M3 OS	ICON Bus 50100 M3 OS	ICON BUS 50G00 M2 CEOS	ICON BUS 50G00 M2 CEOS	ICON Bus 50G00 M2 OS	ICON BUS 50G10 M2 OS	ICON BUS 50G10 M2 OS	ICON Bus 50000 M0 OS	ICON Bus 50010 M0 OS	ICON Bus 50000 M0 OS	ICON BUS 50010 M0 OS	ICON BUS 51100 M1 CB	ICON BUS 51110 M1 CB	ICON BUS 51110 M1 CB	ICON BUS 51110 M1 CB					
Electrical properties																																																						
impedance		150 Ω	●	●	●	●	●	●	●																																													
		120 Ω																																																				
		105 Ω									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
		100 Ω	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
type A profile acc. to IEC 61158-2										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
operating voltage		300 V	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
FISCO for IS-Application										●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
Temperature range – installation		–5 up to +50 °C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Temperature range – operation		–40 up to +70 °C	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●													●	●	●	●	●	●	●	●	●	●	●	●		
		–40 up to +90 °C													●	●	●												●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
		–40 up to +105 °C																																																				
Chemical properties																																																						
oil resistance			+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+++	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
zero halogen								●	●				●	●												●	●																											
resistance to chemicals			+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+++	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
Reaction to fire																																																						
flame test on single cables		IEC 60332-1-2	●	●	●		●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
flame test on bunched cables		IEC 60332-3-24 (Cat. C)	●	●	●		●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
smoke density		IEC 61034-2, <40 %					●	●					●	●													●	●																										
light transmittance		IEC 61034-2, >60 %					●	●					●	●													●	●																										
Circuit integrity		IEC 60331-21 (75 °C; 90 min)															++	++																																				
Installation & environmental properties																																																						
suitable for direct burial							●	●					●		●		●						●	●		●			●		●			●	●	●	●		●		●	●		●		●		●		●		●		
suitability for tensile loads			○	○	○	○	+++	○	○	○	○	○	+++	○	+++	○	++	○	○	○	○	+++	+++	○	+++	○	○	+++	○	+++	○	+++	○	+++	+++	+++	++	○	○	+++	○	+++	+++	○	+++	○	+++	○	+++	○	+++	○	+++	○
suitability for pressure and impact loads						+++						+++		+++		++						+++	+++	+++			+++		+++		+++		+++	+++	+++	++			+++		+++	+++	+++		+++		+++		+++		+++			
resistance against rodents						++						++		++		○						++	++	++			++		++		++		++	++	++	○			++		++	++	++		++		++		++		++			
protection against inducing currents						++						++		++		○						++	++	++			++		++		++		++	++	++	○			++		++	++	++		++		++		++		++			

Ranking for marked criteria as			
excellent	+++	limited	
improved	++	depending on	
good	+	national regulations	
complied		on request	

See two examples of our ICON Bus cable designs:



Characteristics

Application	Fieldbus cable, Type A, for bus systems Fieldbus™ Foundation acc. to IEC 61158-2. Suitable for use in hazardous classified locations class I and class II division 2 acc. to NEC 501.10(B) and NEC 502.10(B) or zone 1 and zone 2, group II, acc. to IEC 60079-14, resp. Recommended for indoor and outdoor installation, on racks, trays, in conduits, in dry and wet locations; not for direct burial.	Fieldbus cable, Type A, for bus systems Fieldbus™ Foundation acc. to IEC 61158-2 and FF-844. Suitable for use in hazardous classified locations class I and class II division 2 acc. to NEC 501.10(B) and NEC 502.10(B) or zone 1 and zone 2, group II, acc. to IEC 60079-14, resp. Recommended for indoor and outdoor installation, on racks, trays, in conduits, in dry and wet locations; for direct burial. Recommended for increased mechanical stresses.
Conductor	plain annealed copper wire, stranded, size AWG 18	tinned copper wire, stranded, size AWG 18/7
Insulation	foamed polyethylene with skin layer	cross linked polyethylene
Individual screen	–	plastic coated aluminium tape in contact with tinned copper drain wire
Collective screen	plastic coated aluminium tape in contact with tinned copper drain wire and tinned copper wire braid	plastic coated aluminium tape in contact with tinned drain wire and tinned copper wire braid
Inner sheath	–	polyvinyl chloride PVC, orange
Armour	–	galvanised round steel wires
Outer sheath	polyvinyl chloride PVC, orange	polyvinyl chloride PVC, orange
Cable type	ICON BUS 50900 M0 CEOS	ICON BUS 51110 M1 IS/OS

ICON Bus\_en/Rev06/2016 -Mex/rev 2021